


PLEXIGLAS RESIST®

WP 76/18

Product Description

New!
Now in Grey too!

Technical Information

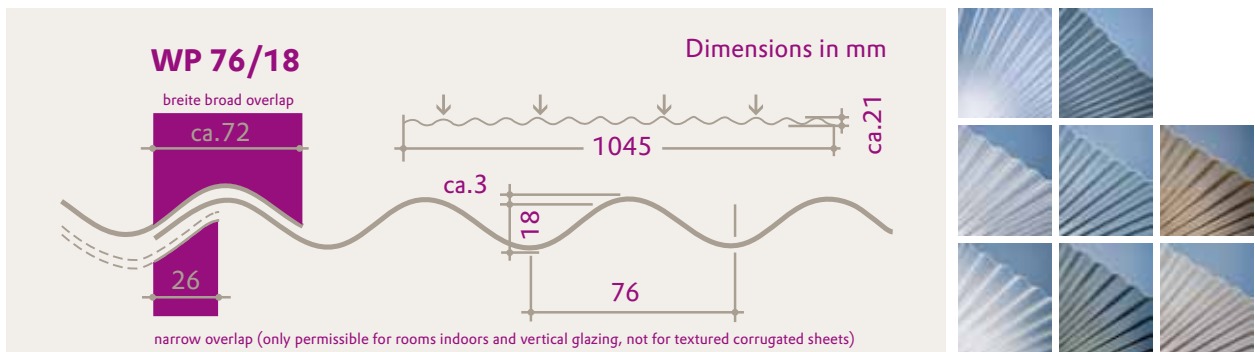

Cross-section of PLEXIGLAS RESIST® WP 76/18 (dimensions in mm)

Product and Benefits

PLEXIGLAS RESIST®*) WP 76/18 is a highly light-transmitting and durably weather-resistant corrugated sheet made of impact-modified acrylic (polymethyl methacrylate, PMMA).

PLEXIGLAS RESIST® WP 76/18 is suitable for

- patio roofs
- carports
- porches
- verandas
- façades
- windbreaks
- sight screens
- infill panels for balconies, stairs, etc.
- lampshades, decorative elements, store fixtures, exhibition booths
- etc.

Advantages of

PLEXIGLAS RESIST® WP 76/18

- The sheets are extremely UV-resistant, with a 30-year guarantee against yellowing**.
- They offer excellent protection against harmful UV radiation.
- They are safe and easy to handle.
- They are guaranteed to be resistant for 10 years to hailstones with a kinetic energy of 1 joule.
- They are available in different colors and with different surface textures.

Stability and Impact Strength

Owing to their special formulation, PLEXIGLAS RESIST® WP 76/18 sheets are highly impact-resistant and are easy to machine using simple tools.

They are also much thicker than many other corrugated sheets and therefore show high inherent rigidity and loadbearing capacity. This means that PLEXIGLAS RESIST® corrugated sheets show much less deflection under snow load, making them safer and more attractive.

Surface Textures and Color

Due to their various colors (Clear, Grey, Brown) and surface textures (Smooth, Honeycomb, C texture), PLEXIGLAS RESIST® WP 76/18 sheets lend themselves perfectly to different building styles. In addition to these benefits, the different colors and surface textures enable interesting design and lighting effects to be obtained.

Installation and Care Instructions

On roofs and façades, PLEXIGLAS RESIST® WP 76/18 are fastened pointwise to an adequately sized supporting structure. The textured side of the sheet is installed facing downwards/inwards. Given correct installation, rain washes off any soiling, but we still recommend that the PLEXIGLAS RESIST® corrugated sheets be cleaned once a year according to our care instructions, in order to conserve their full value.

*) European Patent 149 182

**) This applies to Clear PLEXIGLAS® corrugated sheets according to the guarantee statement.



The sheet is completely protected against UV radiation by its Naturally UV-Stable Technology.



Technical Data (typical values)

Available lengths	2,000 to 7,000 mm	
Light transmittance τ_{D65}	Clear 0A001 Smooth	ca. 90%
	Clear 0A001 Honeycomb	ca. 81%
	Clear 0A001 C	ca. 88%
	Grey 7RW01 Smooth	ca. 45%
	Grey 7RW01 Honeycomb	ca. 45%
	Grey 7RW01 C	ca. 45%
	Brown 8A001 Honeycomb	ca. 55%
Brown 8A003 C	ca. 75%	
Coefficient of linear thermal expansion α	0.08 mm/m°C	
Possible expansion due to heat and moisture	ca. 6 mm/m	
Maximum service temperature without load	70 °C	

Fire Behavior

- The fire behavior of PLEXIGLAS® is rated as European Class E to DIN EN 13501.
- PLEXIGLAS® burns almost entirely without smoke according to DIN 4102 and is easy to extinguish.
- The smoke gases produced by PLEXIGLAS® are neither acutely toxic according to DIN 53436, nor corrosive according to DIN VDE 0482-267.
- Roof surfaces glazed with PLEXIGLAS® open up by melting in the event of fire, allowing smoke and heat to escape.

Guarantee

The guarantee conditions for this and other products are available at www.plexiglas.net.

Loadbearing Capacity

Support spacing

According to the installation instructions for PLEXIGLAS® corrugated sheets with pointwise fastening, the PLEXIGLAS RESIST® WP 76/18 corrugated sheets require cross-members at the spacings shown in the adjacent table.

Load [N/m ²]	Support spacing [m]
200	1.70
400	1.20
600	1.00
800	0.80
1000	0.75
1200	0.65



EVONIK
INDUSTRIES

Evonik Röhm GmbH
Performance Polymers Business Unit
Kirschenallee
64293 Darmstadt
Germany
info@plexiglas.net
www.plexiglas.net
www.evonik.com

® = registered trademark

PLEXIGLAS and PLEXIGLAS HEATSTOP are registered trademarks of Evonik Röhm GmbH, Darmstadt, Germany. Evonik Röhm GmbH is certified to DIN EN ISO 9001 (Quality) and DIN EN ISO 14001 (Environment).

This information and all further technical advice is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. In particular, no warranty, whether express or implied, or guarantee of product properties in the legal sense is intended or implied. We reserve the right to make any changes according to technological progress or further developments. The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Performance of the product described herein should be verified by testing, which should be carried out only by qualified experts in the sole responsibility of a customer. Reference to trade names used by other companies is neither a recommendation, nor does it imply that similar products could not be used.

Ref. No. 233-2 January 2010
xx/0110/09782 (de)